




In-Line Surge Protector, RS-232 (DB25 5-Wire)

Get convenient in-line surge protection for an RS-232 DB25 connection.

Put avalanche diode technology where you need it.

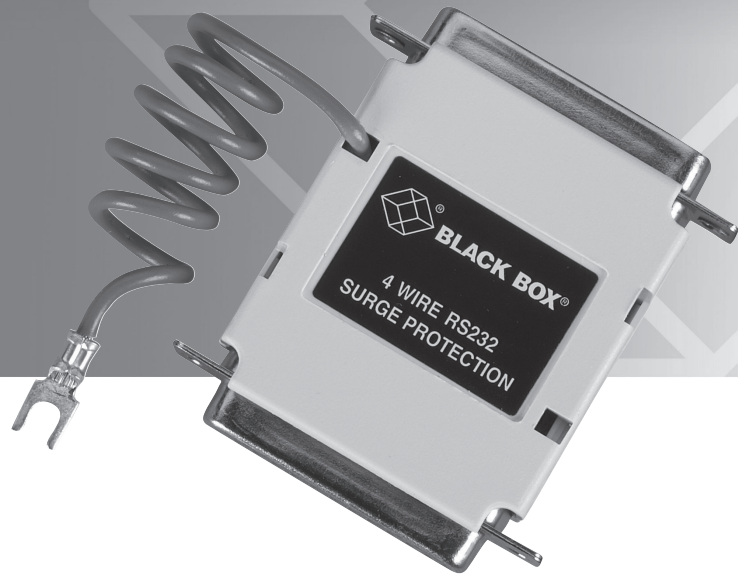

Specifications

Application: RS-232
Ground Wire: Yes
Maximum Shunt Capacitance: <30 pF
Peak Pulse Current: 60 amps
Protection Type: Avalanche diode technology
Response Time: <5 ns
Pins Protected: 1, 2, 3, 7, 20
Standard Clamping Voltage: 18 V
Connectors: (1) DB25 M, (1) DB25 F

Overview

This 5-Wire RS-232 Surge Protector protects your RS-232 interface using four wires plus a shield wire on the DB25 connector.

What's included

- In-Line Surge Protector
- Specification sheet

For installation instructions, turn this page over...

Customer Support Information

Order toll-free in the U.S.: Call 877-877-BBOX (outside U.S. call 724-746-5500)
 FREE technical support 24 hours a day, 7 days a week: Call 724-746-5500 or fax 724-746-0746
 Mailing address: Black Box Corporation, 1000 Park Drive, Lawrence, PA 15055-1018
 Web site: www.blackbox.com • E-mail: info@blackbox.com

Installation Steps

To install the Protector, insert the surge protector in series between the data cable and the I/O port of the equipment you wish to protect.

CAUTION: You must attach the connector shell to earth/chassis ground through a grounded AC power receptacle to ensure effective protection.



© Copyright 2010. Black Box Corporation. All rights reserved. Printed in U.S.A. Black Box® and the Double Diamond logo are registered trademarks of BB Technologies, Inc. Double Diamond™ is a trademark of BB Technologies, Inc. Any third-party trademarks appearing in this publication are acknowledged to be the property of their respective owners.

SP141A, rev. 1

FREE, live, 24/7 Tech Support is just 30 seconds away.
724-746-5500 | blackbox.com