


| REVISIONS |                 |      |
|-----------|-----------------|------|
| Rev       | DESCRIPTION     | DATE |
| A         | INITIAL RELEASE |      |

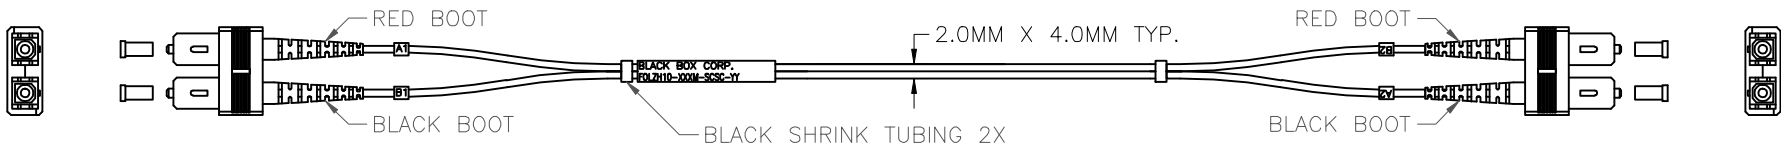

| OPTICAL TEST DATA @ 850NM |                        |
|---------------------------|------------------------|
| INSERTION LOSS            | MAX .5dB               |
| BACK REFLECTION           | MIN 25dB               |
| NUMERICAL APERTURE        | .278 +/- 0.015         |
| FERRULE COMPRESSION       | 7.8N TO 11.8N          |
| OM3 50µ                   | CORNING CLEARCURVE OM3 |
| ATTENUATION               | 3.5dB/KM @ 850NM       |
|                           | 1.5dB/KM @ 1300NM      |
| BANDWIDTH                 | 2000Mhz/KM             |
| LINK LENGTH (10GB/S)      | 300 METERS             |

| YY = AVAILABLE COLOURS |        |
|------------------------|--------|
| BL                     | BLUE   |
| OR                     | ORANGE |
| GN                     | GREEN  |
| BR                     | BROWN  |
| GR                     | GREY   |
| WH                     | WHITE  |
| RD                     | RED    |
| BK                     | BLACK  |
| YL                     | YELLOW |
| VT                     | VIOLET |
| PK                     | PINK   |
| AQ                     | AQUA   |

| NOTE: |  |
|-------|--|
| 1     | DUPLEX ZIP PATCH CORD                    |
| 2     | LOW-SMOKE, ZERO-HALOGEN                  |
| 3     | STANDARD BLACK BOX LENGTH TOLERANCE      |
| 4     | CHANNEL MARKERS AND COLOR CODED BOOTS    |
| 5     | TEST RESULTS SUPPLIED WITH EACH ASSEMBLY |
| 6     | PACKAGED INDIVIDUALLY                    |
| 7     | 12 COLORS AVAILABLE                      |
| 8     | ROHS COMPLIANT                           |
| 9     | XXX = LENGTH IN METERS                   |
| 10    | YY = COLOR OF JACKET                     |

| BLACK BOX LENGTH TOLERANCE |    |           |
|----------------------------|----|-----------|
| 0 TO 3 METERS              | -0 | +7.6 CM   |
| 3 TO 30.5 METERS           | -0 | +15.2 CM  |
| 30.5 METERS OR MORE        | -0 | +30.48 CM |

The information contained in this document is the sole property of Black Box Corporation of Pennsylvania. Any reproduction in part or whole without the written permission of Black Box Corp. is prohibited.  
 © Copyright 2012 Black Box Corporation of Pennsylvania d/b/a Black Box Network Services. All Rights Reserved.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES  
 TOLERANCES:  
 FRACTIONAL ±  
 ANGULAR: MACH ± BEND ±  
 TWO PLACE DECIMAL ±  
 THREE PLACE DECIMAL ±  
 INTERPRET GEOMETRIC TOLERANCING PER  
 MATERIAL  
 FINISH  
 DO NOT SCALE DRAWING

**BLACK BOX NETWORK SERVICES**

|           |        |      |            |            |                                |
|-----------|--------|------|------------|------------|--------------------------------|
| DRAWN     | JDSHW  | DATE | 12/01/2016 | TITLE:     | SC - SC FIBER OPTIC PATCH CORD |
| ENG APPR. | STEVEN | DATE | 12/01/2016 | SIZE       | DWG. NO.                       |
| CHECKED   | STEVEN | DATE | 12/01/2016 | B          | FOLZHI0-XXXM-SCSC-YY           |
| COMMENTS: |        |      |            | REV        | A                              |
|           |        |      |            | SCALE: 1:1 | SHEET 1 OF 1                   |