



# Emerald<sup>®</sup> Unified KVM

High-Performance KVM Solutions



The award-winning Emerald® Unified KVM extension and matrix switching platform, developed and manufactured by Black Box®, ushers in a new era in KVM technology — eliminating sacrificed performance, compromised solutions and fractured networks. Emerald can be operated as a point-to-point extension or an IP-based KVM matrix switching system that supports HD and pixel-perfect 4K video signals, high-speed USB 2.0 and bidirectional analog audio. And it provides access to both physical and virtual machines via RDP/RemoteFX or PCoIP. With Emerald, you are ready for the future — no matter what form it takes.



Command and Control Rooms



Broadcast and Post-Production




Medical



Air Traffic Control and ATM



Public Safety



Industrial

### Ideal for a Wide Range of Industries

Emerald's flexibility and scalability make it ideal for various industries, including 24/7 command and control rooms, medical imaging and process monitoring environments.



# Benefits of Emerald

## Point-to-Point Extension or Matrix Switching

Start small with a simple point-to-point extension and grow your system to a high-performance KVM matrix. Combine HD and 4K transmitter and receiver units, connect them to an IP switch and add the Boxilla® KVM Manager to your system as it grows beyond 32 end points.

## Pixel-Perfect 4K 60 Hz Video over IP

Extend and switch pixel-perfect HD (DVI) or 4K (DisplayPort 1.2) video, high-speed USB 2.0 and bidirectional analog audio. Choose from five video compression settings to balance video quality and bandwidth consumption.

## Virtual Machine Access

Provide BIOS-level, high-speed KVM access to virtual machines using RDP/RemoteFX or PCoIP – supports VMware® and Microsoft®. Requires no additional hardware transmitter.

## Flexible, Redundant Network Connectivity

Emerald® PE and 4K extenders provide redundant network ports that enable signal transmission over CATx, fiber, an IP network or even the internet. Redundant network ports allow for fast, automated switchover in case one connection is lost.

## Award-Winning KVM Management

Centrally manage your complete KVM network through the user-friendly, web-based KVM management platform Boxilla. Monitor bandwidth consumption, control user access and receive automated system alerts - all from your preferred web browser.

## Remote App and ZeroU Transmitter


The Emerald Remote App turns any Windows® 10 device into a software KVM receiver, allowing users to monitor devices remotely and without additional hardware. Or use the USB-powered ZeroU Transmitter to save valuable rack space.

## Multiple Control Options

Use ControlBridge® or any third-party control system to switch between sources or to select application presets. This allows simple and flexible operation even within complex control room settings.

## Reliable System Components

Emerald works with a variety of additional components that can enhance your KVM system, such as 1-, 10-, or 100-Gbps IP switches, SFP(+) modules, a switchable USB 2.0 extender, mounting kits, interface adapters and a central power supply for transmitter units.

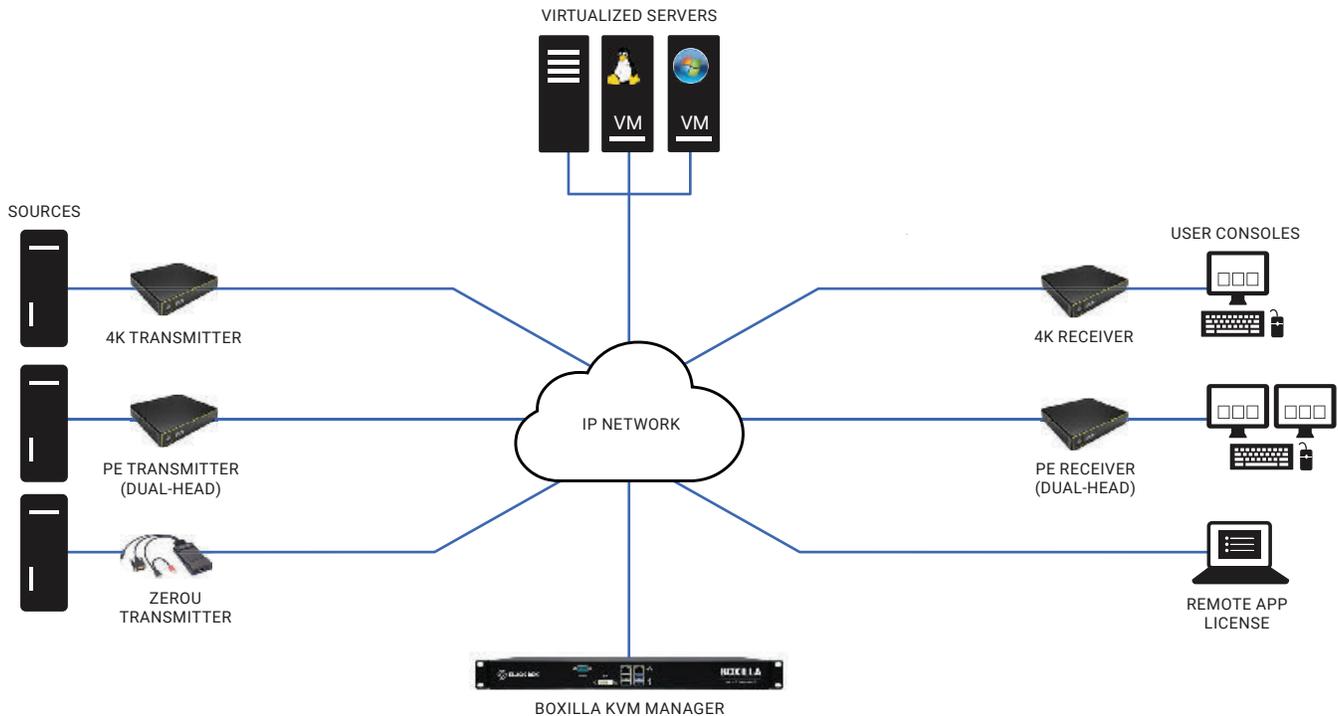

Emerald matrix switching setup that connects multiple source PCs, virtual machines and user workstations


# Emerald System Highlights

## High-Quality Video with Low-Bandwidth Consumption


Emerald® receivers and transmitters deliver up to pixel-perfect 4K 60 Hz video resolutions. The management GUI lets you choose from five video compression settings, including highly compressed (ca. 35 Mbps, 1080p at 60 fps) and pixel perfect (450 Mbps, 1080p at 60 fps). For pixel-perfect 4K at 60 Hz 4:4:4 video transmission, a 10-Gbps connection is required.

## Virtual Machine Connectivity

With Emerald, VM connectivity is brought to a whole new level. Access VMware® and Microsoft® VMs over RDP 8.1/Remote FX or PCoIP in real time and provide a high-quality user experience across any given distance. By adding the VMs to a matrix setup, multiple users can switch seamlessly between various physical and virtual desktops without being able to tell the difference. Connecting VMs to the Emerald IP Switch eliminates the need for additional transmitter units.

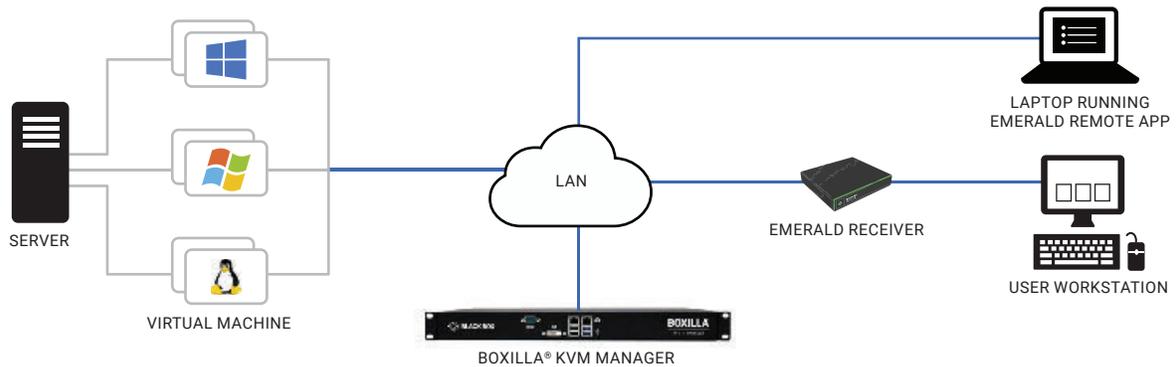

Virtual machines connected in an Emerald KVM Matrix

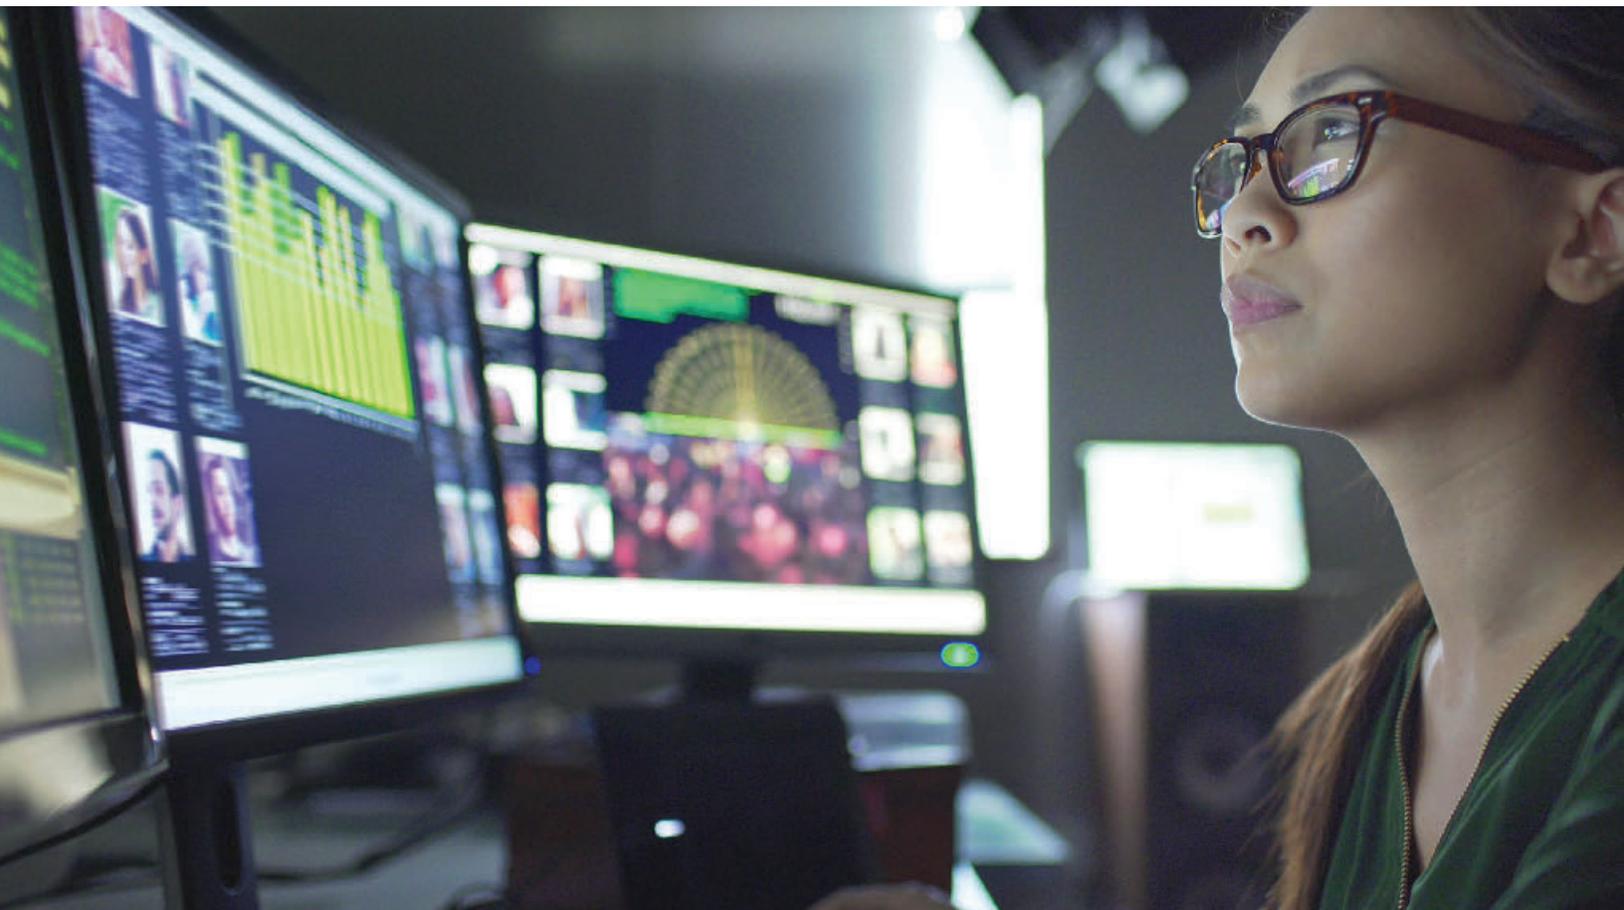




## Resilience and Network Management

For fail-safe operation and maximum uptime, Emerald® provides network resiliency at every level – all the way up to complete switch over from one control room to a backup control room location. If your system requires more ports, simply add or cascade IP switches.

- Redundant network connectors (Emerald PE and 4K) feature instant switchover in case one network connection fails.
- Use the central power supply to keep your devices' power status monitored and provide a redundant power supply.
- Never miss a critical event or run out of bandwidth with Boxill's extended KVM status dashboard and automated alerts.

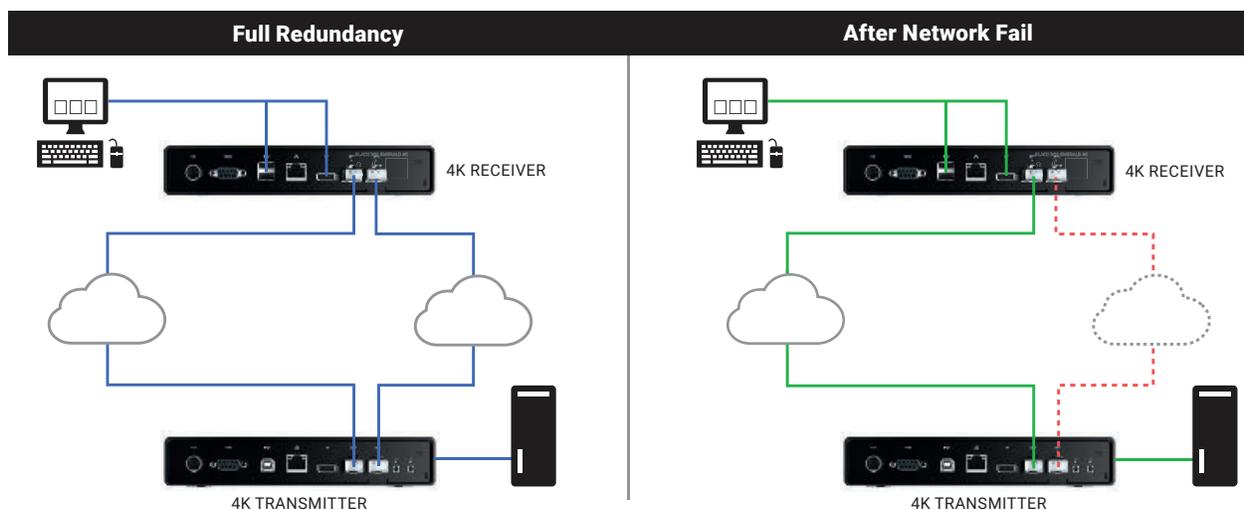

Redundant network paths provide fail-safe operation


# Emerald Unified KVM Product Family

## Emerald 4K


Emerald® 4K transmitters and receivers connect users and computers through a point-to-point connection or an IP-based KVM matrix switching network. The 4K KVM units support various video resolutions up to 4K, high-speed USB 2.0 devices and bidirectional analog stereo audio through redundant SFP+ ports. Emerald enables remote, BIOS-level computer access to both physical and virtual machines.

- Switch and extend up to pixel-perfect 4K video (lossless compression, 10-bit color ready); bidirectional analog audio; and up to four USB devices (HID and/or high-speed, transparent USB 2.0), such as keyboards, mice, Wacom® tablets, touch interfaces and flash drives.
- EDID pass-through feature supports a wide range of resolutions, ensuring video signals display correctly at all times.
- Build a KVM matrix that supports up to 32 end points through the built-in management interface, or use the Boxilla® KVM Manager to create even larger matrices.
- Transmit KVM signals over IP and securely access critical devices over a WAN or the internet.
- Real-time virtual machine access via RDP 8.1/RemoteFX or PCoIP.
- OS-agnostic technology allows you to connect any system, including Windows®, Mac OS® or Linux.
- Connect via dual network ports for fail-safe operation.
- Active Directory support.
- Supports access to VNC servers.
- Supports extension distances of up to 100 meters (CATx), 300 meters (multimode fiber) or 10 kilometers (single-mode fiber).
- Combine with Switchable USB Extenders (#EMD100USB) to extend and switch USB 2.0 signals up to 480 Mbps.
- Also available as a TX/RX kit that includes SFP+ modules: #EMD4000-KIT.

### Emerald 4K Transmitter (EMD4000T)

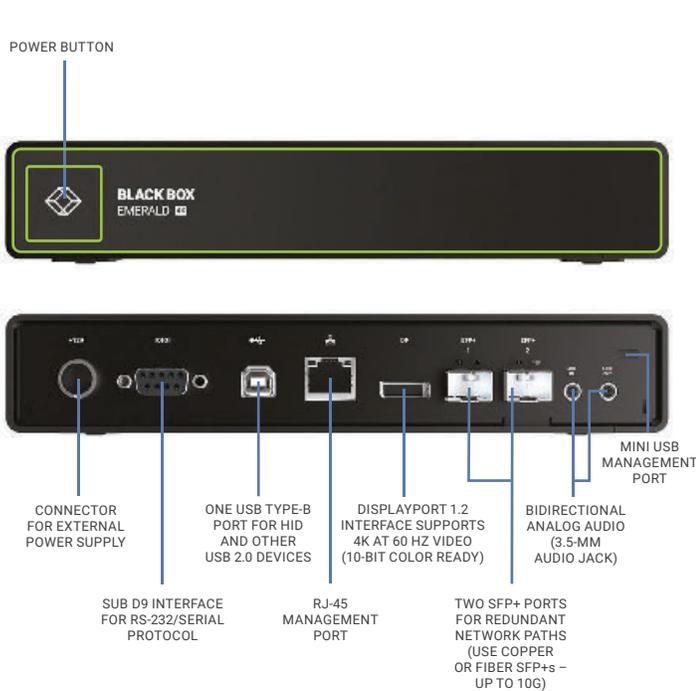

### Emerald 4K Receiver (EMD4000R)

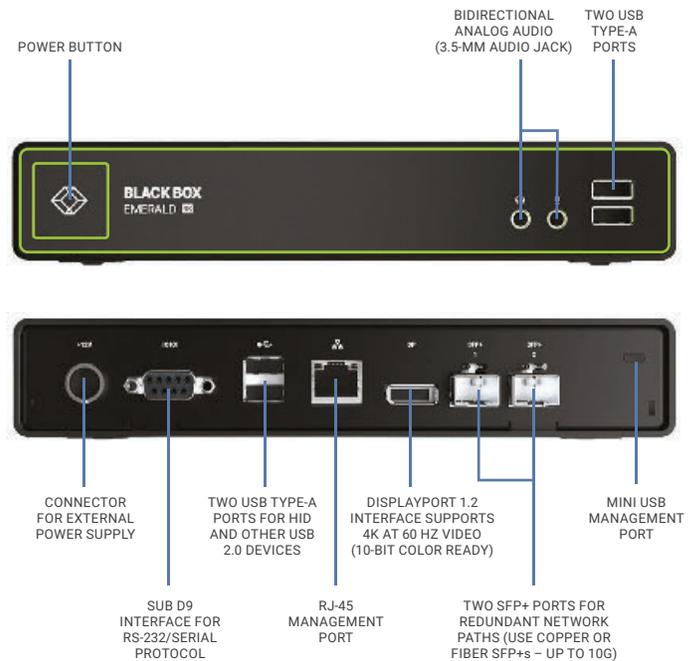

### Emerald 4K Technical Specifications and Interfaces


Product Code	Video Heads	Max Resolution	USB Ports	Network Ports	Serial/Analog Audio	Power Connectors
EMD4000T	(1) DisplayPort 1.2,	4096 X 2160 at 60 HZ	(1) USB 2.0 Type B	(1) RJ-45, (2) SFP+	(1) DB9, (2) 3.5-mm audio jack	(1) 12-VDC, 3A
EMD4000R	(1) DisplayPort 1.2,	4096 X 2160 at 60 HZ	(4) USB 2.0 Type A	(1) RJ-45, (2) SFP+	(1) DB9, (2) 3.5-mm audio jack	(1) 12-VDC, 3A

## Emerald PE


Emerald® PE transmitters and receivers are ideal extenders for customers seeking superior KVM performance, system redundancy, and crystal-clear HD video. Extend and switch pixel-perfect DVI video up to 1920 x 1200 at 60 Hz, high-speed USB 2.0 devices and bidirectional analog stereo audio through redundant network ports. With a similar feature set as Emerald 4K units, these extenders are ideal for critical 24/7 applications including process monitoring, broadcast production, and medical imaging. Emerald PE is available as single-head or dual-head version.

- Switch and extend up to pixel-perfect HD video (lossless compression), bidirectional analog audio, and up to four USB devices.
- EDID pass-through feature supports a wide range of resolutions, ensuring video signals display correctly at all times.
- Choose from five video compression settings to balance video quality and bandwidth consumption.
- Transmit KVM signals over IP and securely access critical devices over a WAN or the internet.
- Real-time virtual machine access via RDP 8.1/RemoteFX.
- Connect via dual network ports – (1) RJ-45 and (1) SFP – for fail-safe operation.
- Supports access to VNC servers.
- Extend KVM signals 100 meters over CATx, 300 meters over multimode fiber, or 10 kilometers over single-mode fiber.

### Emerald PE Transmitter (EMD2000PE-T)

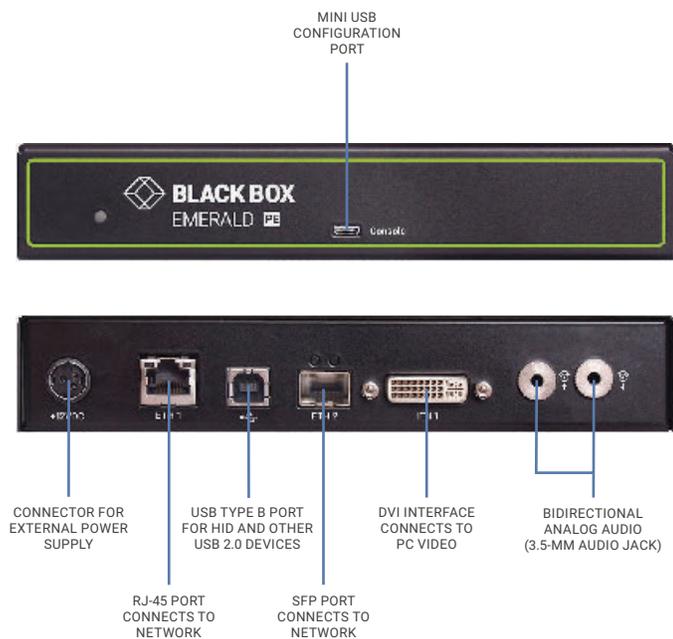

### Emerald PE Receiver (EMD2000PE-R)

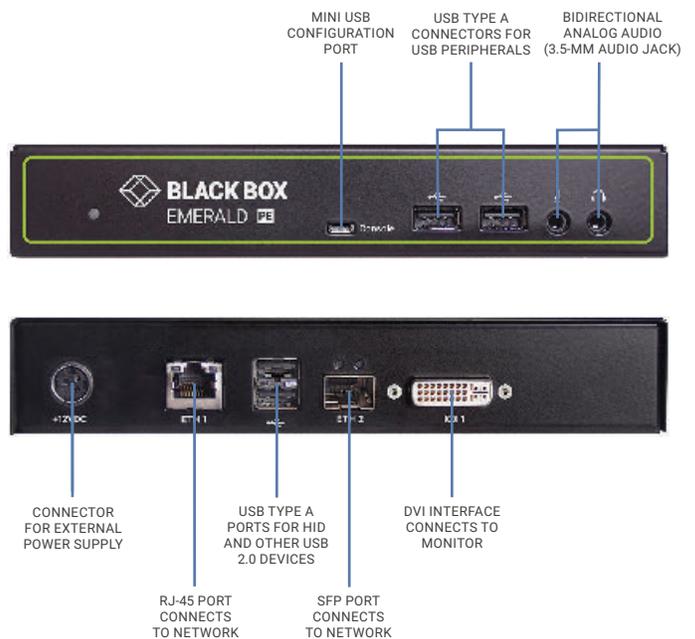

### Emerald PE Technical Specifications and Interfaces


Product Code	Video Heads	Max Resolution	USB Ports	Network Ports	Serial/Analog Audio	Power Connectors
EMD2000PE-T	(1) DVI	1920 X 1200 at 60 HZ	(1) USB 2.0 Type B	(1) RJ-45, (1) SFP	(1) DB9, (2) 3.5-mm audio jack	(1) 12-VDC, 3A
EMD2000PE-R	(1) DVI	1920 X 1200 at 60 HZ	(4) USB 2.0 Type A	(1) RJ-45, (1) SFP	(1) DB9, (2) 3.5-mm audio jack	(1) 12-VDC, 3A
EMD2002PE-T	(2) DVI	1920 X 1200 at 60 HZ	(1) USB 2.0 Type B	(1) RJ-45, (1) SFP	(1) DB9, (2) 3.5-mm audio jack	(1) 12-VDC, 3A
EMD2002PE-R	(2) DVI	1920 X 1200 at 60 HZ	(4) USB 2.0 Type A	(1) RJ-45, (1) SFP	(1) DB9, (2) 3.5-mm audio jack	(1) 12-VDC, 3A

## Emerald SE


Emerald® SE transmitters and receivers are your entry into the world of Unified KVM. Extend and switch DVI video up to HD resolutions, USB 2.0 devices and bidirectional analog stereo audio. Pair transmitter and receiver units to create a P2P connection or build an IP-based KVM matrix switching setup. Take advantage of the USB-powered ZeroU Transmitter that saves valuable rack space. Or add licenses for the Emerald Remote App to connect an Emerald SE transmitter directly to any Windows® 10 device – without the need for an additional hardware receiver unit. Emerald SE is available as single-head or dual-head version.

- Switch and extend up to visually lossless HD video and up to four USB devices (HID and/or high-speed, transparent USB 2.0).
- Choose from five video compression settings to balance video quality and bandwidth consumption.
- EDID pass-through feature ensures video signals display correctly at all times.
- Build a KVM matrix that supports up to 32 end points through the built-in management interface, or use the Boxilla® KVM Manager to create even larger matrices.
- Transmit signals over IP and securely access critical devices over a WAN or the internet.
- OS-agnostic technology allows you to connect any system, including Windows®, Mac OS® or Linux.
- Real-time virtual machine access via RDP 8.1/RemoteFX.
- Supports Active Directory (Boxilla required).
- Supports point-to-point extension distances of up to 100 meters (CATx).
- Remote App KVM Receiver licenses for one, five, 10 or 20 connections available (Boxilla required).
- USB-powered ZeroU Transmitter unit available that saves rack space.
- Combine with Switchable USB Extenders (#EMD100USB) to extend and switch USB 2.0 signals up to 480 Mbps.

### Emerald SE Transmitter (EMD2000SE-T)

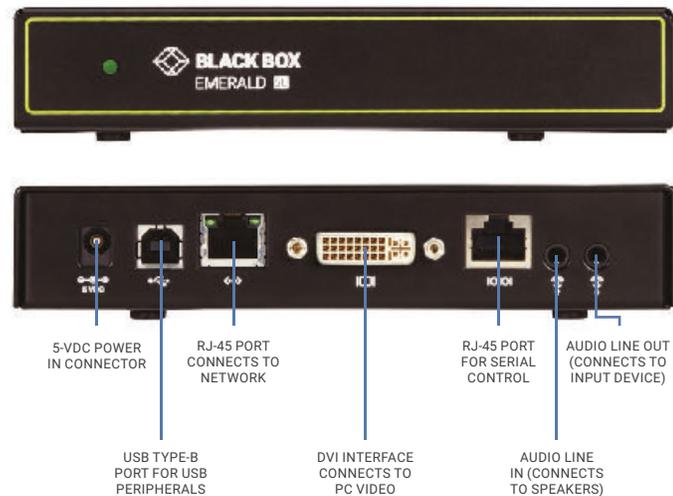

### Emerald SE Receiver (EMD2000SE-R)

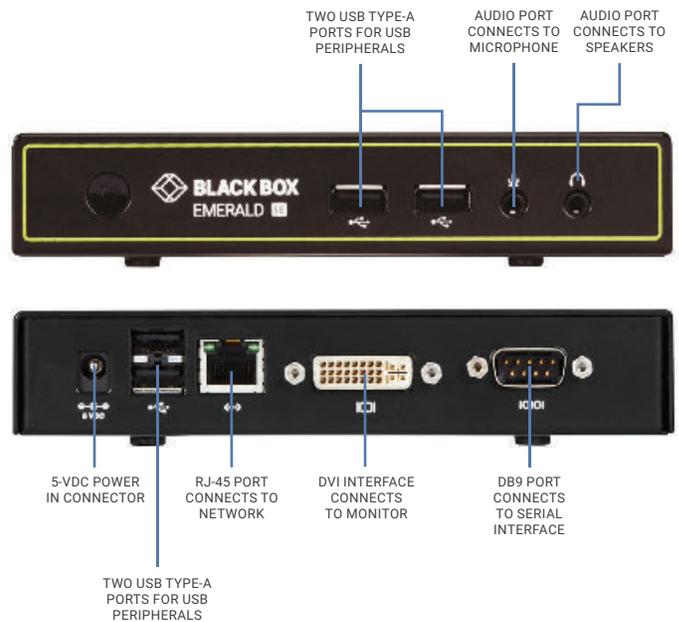

## Emerald SE Technical Specifications and Interfaces


Product Code	Video Heads	Max Resolution	USB Ports	Network Ports	Serial/Analog Audio	Power Connectors
EMD2000SE-T	(1) DVI	1920 X 1200 at 60 HZ	(1) USB 2.0 Type B	(1) RJ-45	(1) RJ-45 serial, (2) 3.5-mm audio jacks	(1) 5-VDC, 4A
EMD2000SE-R	(1) DVI	1920 X 1200 at 60 HZ	(4) USB 2.0 Type A	(1) RJ-45	(1) DB9 serial, (2) 3.5-mm audio jacks	(1) 5-VDC, 4A
EMD2002SE-T	(2) DVI	1920 X 1200 at 60 HZ	(1) USB 2.0 Type B	(1) RJ-45	(2) 3.5-mm audio jacks	(1) 5-VDC, 4A
EMD2000SE-R	(2) DVI	1920 X 1200 at 60 HZ	(4) USB 2.0 Type A	(1) RJ-45	(2) 3.5-mm audio jacks	(1) 5-VDC, 4A

## Emerald ZeroU

The small form factor Emerald® ZeroU DVI Transmitter consumes zero rack space, enabling you to add more critical IT equipment to your data center. This transmitter works with the Emerald SE Receiver to provide a seamless desktop experience anywhere on a TCP/IP network while allowing the actual hardware to be securely housed in a corporate data center. It supports visually lossless full HD 1080p video, audio and USB for HID devices.

- Small form factor transmitter that is barely bigger than today's average cell phone.
- Supports HD DVI video up to 1920 x 1200.
- Power over USB eliminates the need for extra cables.
- Works with Emerald PE and SE receivers.

### Emerald ZeroU Transmitter (EMD200DV-T)

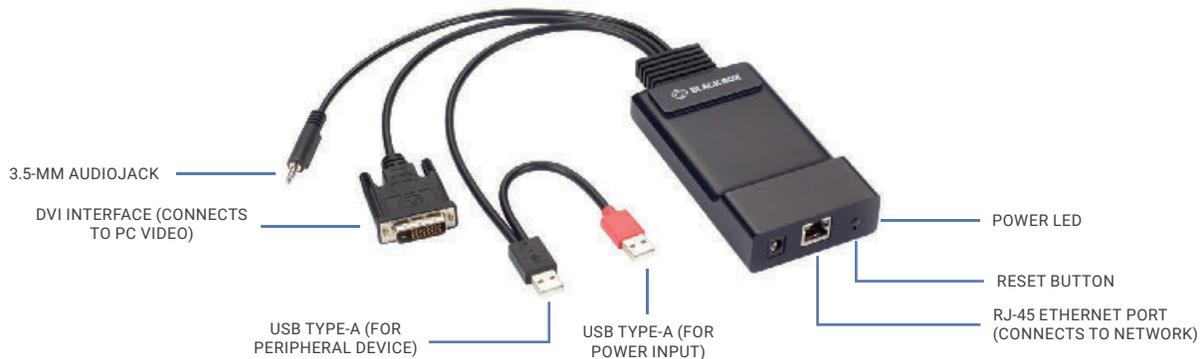

Product Code	Video Heads	Max Resolution	USB Ports	Network Ports	Serial/Analog Audio	Power Connectors
EMD200DV-T	(1) DVI	1920 X 1200	(1) USB 2.0 Type B	(1) RJ-45	(1) 3.5-mm audio jack	(1) 5-VDC, 4A


## Emerald Remote App

The Emerald® Remote App is a license-enabled KVM application that allows remote computer access through Emerald PE and Emerald SE transmitters and the use of virtual machines from any Windows® 10 device in full HD resolution. Through the Remote App, multiple connections can be launched simultaneously, which makes remote monitoring of connected devices even more flexible. Simply add a license for one, five, 10 or 20 connections to your Boxilla® KVM Manager.

- Secure software KVM connection from Windows® 10-based PCs or laptops.
- Supports video resolutions up to 1920 X 1200 and USB HID.
- Open multiple connections simultaneously to manage and view multiple sources.
- Access KVM resources over VPN.
- OS-agnostic technology allows you to connect any system, including Windows®, Mac OS® or Linux.
- Requires Boxilla KVM Manager for license management.

Download the Remote App for free at [blackbox.com/emerald](http://blackbox.com/emerald).

Product Code	Description
EMDRM1-LIC	Emerald Remote App – license for one connection
EMDRM5-LIC	Emerald Remote App – license for five connections
EMDRM10-LIC	Emerald Remote App – license for 10 connections
EMDRM20-LIC	Emerald Remote App – license for 20 connections
EMDRMDEMO-LIC	Emerald Remote App – 30-day demo license for four connections

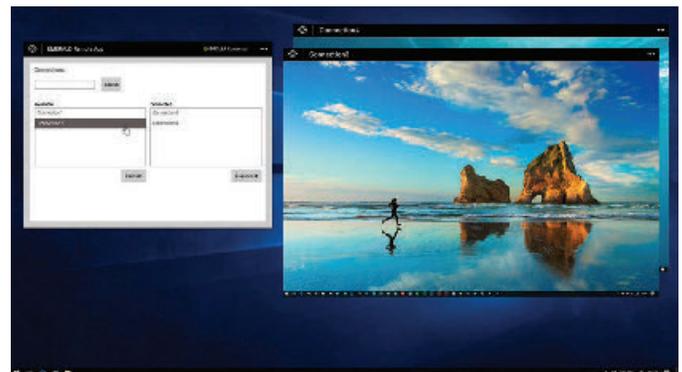

The Remote App runs multiple KVM connections simultaneously

## Boxilla KVM Manager


Boxilla® is a centralized KVM management appliance that enables remote management and monitoring of your complete enterprise KVM network. When connected to an Emerald® KVM Matrix, Boxilla provides a user-friendly web-based GUI that allows users to auto-detect and connect new end points, update firmware, adjust bandwidth consumption, set up automated security alerts and much more. Boxilla comes with multiple license types to accommodate different KVM network sizes.

- Manage deployments and user access rights, monitor KVM status, upgrade firmware, facilitate troubleshooting and provide network security – all from one central command center dashboard.
- Auto device discovery and configuration and advanced user authentication.
- Supports Active Directory for user authentication and mapping to groups.
- Enables connections between multiple Black Box KVM systems, such as DKM and Emerald.
- Redundant network connections for maximum uptime.
- Add redundant Boxilla devices to a KVM matrix for enhanced network security.

Learn more at [blackbox.com/boxilla](http://blackbox.com/boxilla).



Boxilla's web browser-based user interface

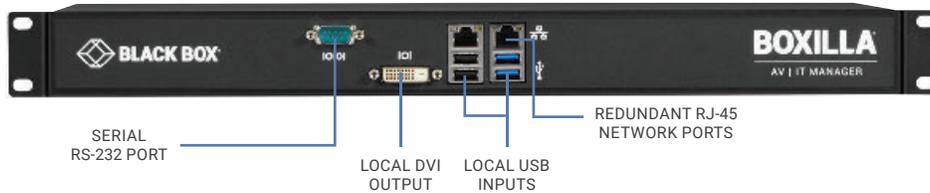

Product Code	Description
BXAMGR	KVM management platform that supports 25 end points
BXAMGR-X <sup>(1)</sup>	KVM management platform that supports 50, 100, 200, 300 or unlimited end points
BXAMGR-LIC-X <sup>(2)</sup>	Licenses for 25, 100, 200, 300 or unlimited additional end points on top of what manager already supports
BXAMGR-LICBAK-X <sup>(3)</sup>	Licenses for 25, 100, 200 or 300 additional active and standby end points on top of what manager already supports

<sup>(1)</sup> X = 50, 100, 200, 300, ULT

<sup>(2)</sup> X = 25, 100, 200, 300, ULT

<sup>(3)</sup> X = 25, 100, 200, 300

# Emerald Comparison Chart

Product Code	Emerald Remote App	Emerald ZeroU TX	Emerald SE	Emerald PE	Emerald 4K
Max Video Resolution	1920 x 1200 at 60 Hz	1920 x 1200 at 60 Hz (DVI)	1920 x 1200 at 60 Hz (DVI)	1920 x 1200 at 60 Hz (DVI)	4096 x 2160 at 60 Hz (DisplayPort 1.2)
Video Quality	High quality ~35fps	Visually lossless	Visually lossless	Pixel perfect	Pixel perfect
Dual-Head Version Available	–	–	✓	✓	–
Network Connectors	–	(1) RJ-45	(1) RJ-45	(1) RJ-45, (1) SFP	(2) SFP+
USB Support	USB HID	USB HID	All USB 2.0 devices	All USB 2.0 devices	All USB 2.0 devices
Max Extension Distance	Unlimited over IP	CATx: 100 meters (328 feet) IP: unlimited	CATx: 100 meters (328 feet) IP: unlimited	CATx: 100 meters (328 feet) Fiber: up to 10 kilometers (6.2 miles) IP: unlimited	
VM Support	RDP/Remote FX, PCoIP	–	RDP/RemoteFX	RDP/RemoteFX	PCoIP, RDP/RemoteFX
Bidirectional Analog Stereo Audio	–	(Speaker only)	✓	✓	✓
KVM Setup	Point-to-point KVM extension that is scalable to a matrix switching setup with unlimited endpoints				

## Emerald KVM – Designed and Built By Black Box®

Emerald® has been independently designed and developed by our expert team of engineers in Limerick, Ireland and Pittsburgh, Pennsylvania. The development team combines an impressive number of years of experience in designing new KVM technology. Emerald holds multiple KVM technology patents.

By constantly expanding our R&D Department, our team is well suited to develop new solutions, upgrades and features that provide you with the best KVM user experience on the market. Through our international and local sales and tech support teams, Black Box can provide you with on-site assessment, project planning and tech support. To learn more, visit [blackbox.com/coe](http://blackbox.com/coe).



# Emerald Accessories

## Switchable High-Speed USB Extenders

This USB extender adds high-speed USB 2.0 support to your Emerald KVM system.

- Switch between high-speed USB 2.0 devices over an IP network.
- Supports full-speed USB 2.0 up to 480 Mbps.
- Supports simultaneous USB sharing that improves collaboration.
- Connect to an Emerald KVM system to automatically switch when target changes.
- Features four USB ports that support USB devices, including USB hubs

Learn more at [blackbox.com/EMD100USB](http://blackbox.com/EMD100USB).



Switchable High-Speed USB Extenders (EMD100USB)

Product Code	Description
EMD100USB	Switchable USB Extender

## Video Cables and Adapters

Use high-quality Black Box® cables and adapters to connect your Emerald KVM System with computers and user consoles. Choose from an extensive product portfolio that includes the following items:

Learn more at [blackbox.com/vca](http://blackbox.com/vca).



VGA to DVI-D Video Converter (KVGA-DVID)

Product Code	Compatible Adapters and Cables
Video Cables	
VCB-DP2 Series (various lengths)	DisplayPort 1.2 (4K60)
EVNDVI02 Series (various lengths)	DVI SL/DL Cable
Video Adapters	
KVGA-DVID	VGA to DVI-D Video Converter, USB Powered (1920 x 1200)
VA-MDP12-DP12	Mini DisplayPort-to-DisplayPort Adapter
VA-DP-DVID-A	DisplayPort to DVI (1920 x 1200)
VA-DP12-HDMI4K-A	DisplayPort to HDMI (1920 x 1080)

## Emerald Mounting Kits

Use these 19-inch rackmount kits to mount Emerald® units on or below tables, behind screens or in racks. The 1U mounting kits are ideal for space-saving installations because they provide space for up to two extender units. Emerald was designed with optimal airflow in mind, so the units will not overheat when placed alongside other components in the rackmounting shelf.

Learn more at [blackbox.com/emk](http://blackbox.com/emk).



Emerald 4K Rackmount Kit, 2 units (EMD4000-RMK1)

Product Code	Description
EMD4000-RMK1	Emerald 4K Rackmount Kit (1U)
DTX1000-RMK1	Emerald SE KVM Single Rackmount Kit (1U)
DTX1000-RMK2	Emerald SE KVM Double Rackmount Kit (1U)

## Central Power Supply

For improved power management and fail-safe operation, use the optional central power hub for eight or 16 units.

- Central power feed to 5-volt or 12-volt DC devices with up to 20 watts per port.
- Web UI for configuration and monitoring of system power status.
- Highest resilience when equipped with second, hot-swappable 600-k hours power supply.

Learn more at [blackbox.com/cps](http://blackbox.com/cps).



Central Power Hub, 16 units (ACR1000-CPH16R)

Product Code	Description
ACR1000-CPH16R	Central Power Hub, 16 Port
ACR1000-CPH8R	Central Power Hub, 8 Port
ACR1000-CPH-PS	Central Power Hub Redundant Power Supply
ACR1000-12V5-CBL3M	Central Power Hub Power Converter Cable - 12 VDC to 5 VDC, 3-m

# Emerald Network Components

## Emerald IP Switches

Emerald® was designed with the needs of IT planners and integrators in mind. To build an Emerald KVM matrix, choose from a variety of Black Box®-tested 1-, 10-, and 100-Gbps switches. Or use your preferred third-party IP switches. Make sure to use managed IP switches that support IP multicast and IGMP at full-wire speed and ensure sufficient bandwidth for the required video quality, resolutions and USB devices.



10G 28-Port IP Switch (EMS10G28)

Learn more at [blackbox.com/ens](http://blackbox.com/ens).

Product Code	EMS1G48	EMS1G24F	EMS10G12	EMS10G28	EMS100G32
Speed	1 Gbps	1 Gbps	10 Gbps	10 Gbps	100 Gbps
Ports	(48) 10/100/1000BT RJ-45, 1.25 Gbps	(24) 1-GbE SFP	(12) 10-GbE SFP+	(28) 10-GbE SFP+	(32) 100-GbE SFP+ or (128) 10-GbE SFP+
Cascade Ports	(4) 10G SFP+	(2) 10-GbE SFP+	(3) 100G QSFP28	(2) 100G QSFP28	—
Capacity	260 Gbps	260 Gbps	960 Gbps	960 Gbps	6.4 Tbps
Dimensions	4.4 (1 RU) x 43.4 x 32 cm (HxWxD)	4.4 (1 RU) X 43.4 X 41 cm (HxWxD)	4.4 (1 RU) x 45 x 20.9 cm (HxWxD)	4.4 (1 RU) x 43.1 x 45.7 cm (HxWxD)	4.4 (1 RU) x 43.4 x 46 cm (HxWxD)
Max Power Consumption	87 W	63 W	180 W	290 W	605 W
Power Input	(2) 90–264 VAC, 50/60 Hz	100–240 VAC 50/60 Hz	(2) 100–240 VAC, 50/60 Hz	(2) 100–240 VAC, 50/60 Hz	(2) 100–240 VAC, 50/60 Hz

## SFP Modules

Emerald 4K Extenders and IP Switches provide a high level of flexibility by offering SFP (1-Gbps), SFP+ (10-Gbps) and QSFP28 (100-Gbps) ports (depends on the type of extender and system application). Use SFPs for HD signal transmissions. Use SFP+ or QSFP28 modules to transmit 4K 60 signals and aggregate multiple connections through a 100-Gbps IP switch. Emerald Extenders and Switches support connectivity through copper, fiber multimode or fiber single-mode cables using a variety of Black Box and third-party SFP modules.



SFP modules

Learn more at [blackbox.com/sfp](http://blackbox.com/sfp).

Product Code	Description	Supported Distance
<b>1-Gbps Connections</b>		
LFP441	SFP, 1250-Mbps, 850-nm Multimode Fiber, LC	550 m
LFP442	SFP, 1250-Mbps, 1310-nm Single-Mode Fiber, LC	20 km
LFP443	SFP, 1250-Mbps, SGMII Interface, RJ-45	100 m
<b>10-Gbps Connections</b>		
LSP441	SFP+ 10-Gbps, 850-nm Multimode Fiber, LC	300 m
LSP442	SFP+ 10-Gbps, 1310-nm Single-Mode Fiber, LC	20 km
LSP443	SFP+ 10-Gbps, RJ-45	30 m
<b>40-Gbps Connections</b>		
QSFP541	QSFP+ 40-Gbps, 850-nm Multimode Fiber, MPO	150 m
<b>100-Gbps Connections</b>		
QSFP441	QSFP28 100-Gbps, 850-nm Multimode Fiber, MPO	100 m
QSFP442	QSFP28 100-Gbps, WDM Single-Mode Fiber, LC	10 km

**Notes:**

- (1) All Black Box SFP Modules feature Extended Diagnostics.
- (2) Black Box Switches also support generic SFP(+) modules.



# Additional Products

## ControlBridge Control Processor and Touchscreen

ControlBridge® is a versatile control processor and touchscreen-based appliance for room automation and intuitive operations control. It allows you to control all aspects of your workspace or control room, including KVM switching, lighting, window shutters, automated furniture position and video walls.

- Multiple control processors and touchscreen devices (7" and 12") available.
- Bidirectional control of any IP-enabled or I/O device.
- Active matrix touchscreen display offers resolutions of 1280 x 800, 32-bit (true color) images and full-motion streaming video preview.
- Includes built-in microphone, speakers and light and motion sensors.
- Set up through a standard web browser.
- Mobile device support through optional app license.
- Black Box will help you to design a custom interface for your specific requirements.



ControlBridge 12" touchscreen

Learn more at [blackbox.com/controlbridge](http://blackbox.com/controlbridge).

Product Code	Description
CB-TOUCH7-T	ControlBridge Touch Panel, 7"
CB-TOUCH12-T	ControlBridge Touch Panel, 12"
CB-CP100	Control processor for small-sized applications
CB-CP200	Control processor for medium to large-sized applications
CB-APP-LIC	ControlBridge Single-Seat Mobile Device License






## Freedom II KM Switches

Freedom KM Switches support the powerful Glide and Switch technology that allows operators to switch between up to eight computers by moving a mouse from one screen to another - without pressing hotkeys or additional buttons. Share a single keyboard and mouse, two USB 2.0 devices and analog audio between all connected systems. Add the monitor identification kit to indicate the active system and monitor through screen-mounted LEDs.

Learn more at [blackbox.com/freedom](http://blackbox.com/freedom).

Product Code	Description
KV0004A-R2	Freedom II KM Switch, 4 Ports
KV0008A-R2	Freedom II KM Switch, 8 Ports
KV0004A-LED	Freedom LED Monitor Identification Kit

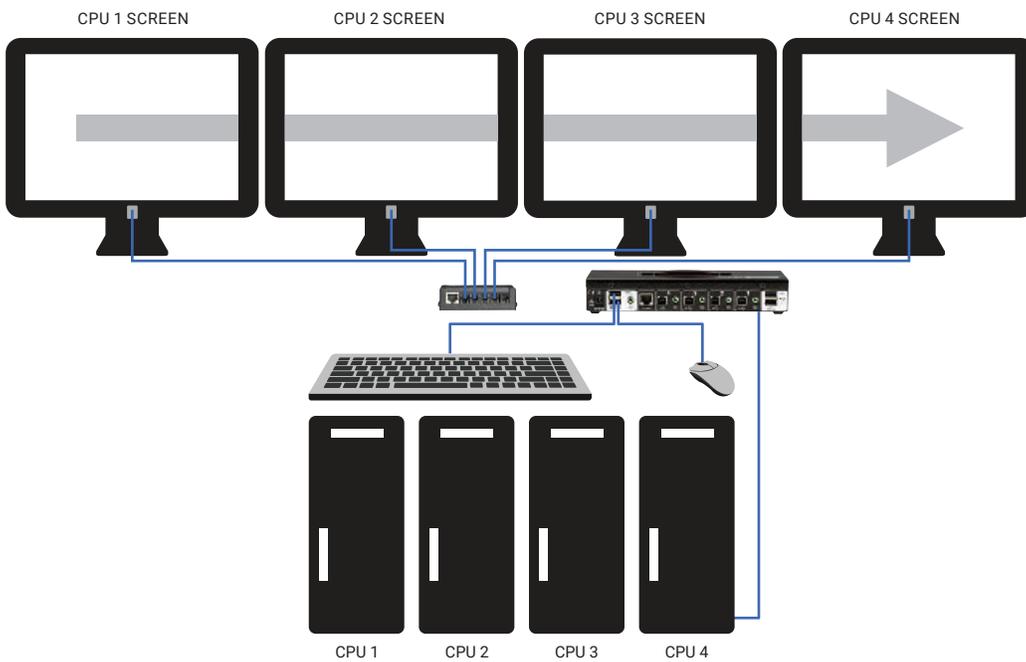

Freedom II Glide and Switch application



# WHY BLACK BOX

## **Expertise**

Black Box project engineers can assist with system assessment, design, deployment and training.

## **Breadth**

Black Box offers the most comprehensive suite of engineered KVM, AV and infrastructure solutions in the industry.

## **Support**

Reflecting our commitment to complete satisfaction, our dedicated team of highly trained support technicians is available by phone free of charge, every day of the year.

## **Service Level Agreements**

Our service level agreements give customers access to technical support, product training, dedicated application engineers and more.

## **Experience**

Providing leading technology solutions since 1976, Black Box helps more than 175,000 customers in 150 countries build, manage, optimize and secure IT infrastructures.

## **Warranties**

Multi-year warranties with multi-year extensions and replacement options are available.

## **Center of Excellence**

Black Box offers a Center of Excellence, featuring professional services and support agreements that help optimize customers' systems and maximize uptime.



**BLACK BOX**

[BLACKBOX.COM/EMERALD](https://blackbox.com/emerald)  
1.877.877.2269

BR00155\_1.28.20